


# ALCF Adjustable Leak Control Flange Installation steps




1. Set the ALCF into the riser.  
Ensure the ALCF is recessed into the substrate and is the lowest point in the floor.  
Ensure the substrate slopes towards the ALCF.



2. Apply a suitable membrane to the substrate.  
Ensure the membrane adheres to the ALCF and into the first vertical surface of the ALCF.

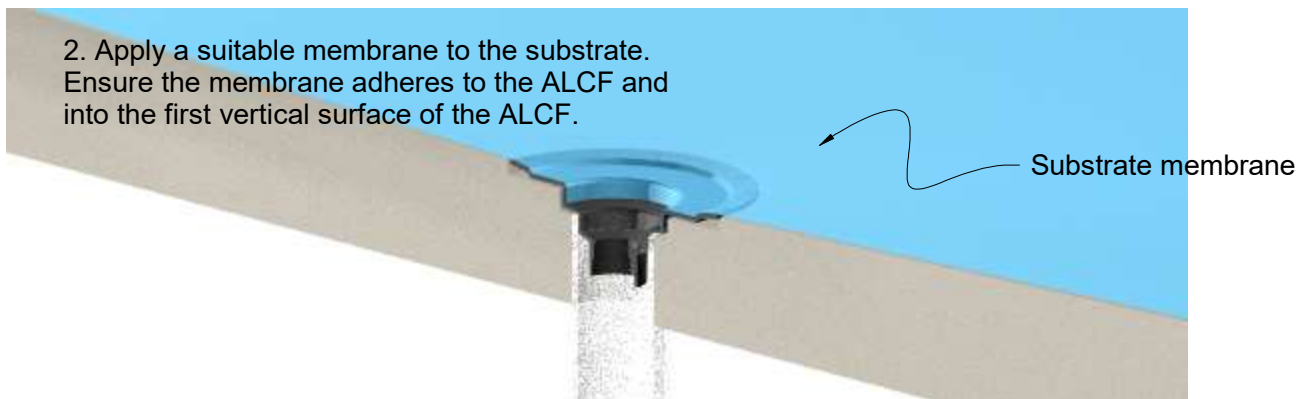

3. If required, lay the second screed or tile bed, sloping towards the ALCF.  
The secondary membrane ring is installed at this time.  
The secondary ring is the lowest point in the tile bed/screed.

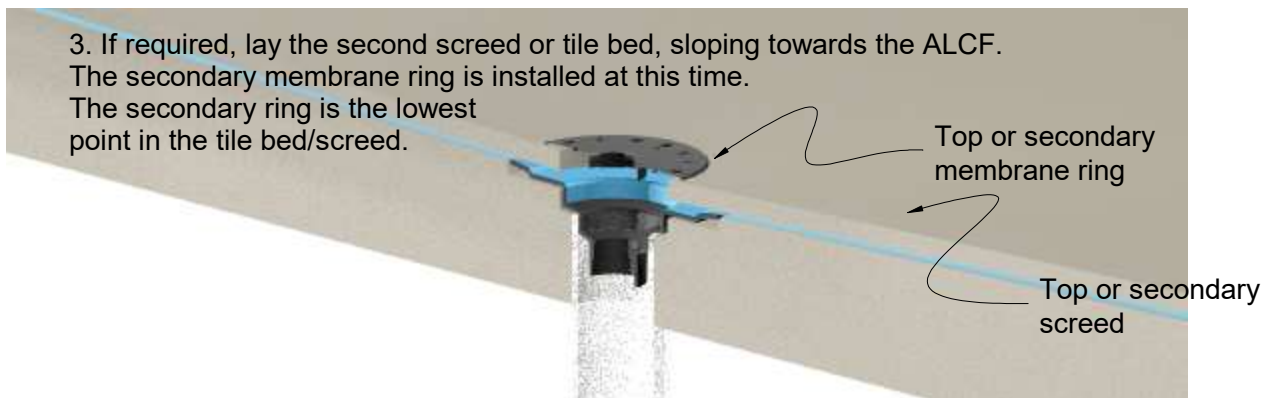

4. Apply a suitable membrane to the second ring.  
Ensure the 4 weep holes on the second ring are not blocked by the membrane.

