


# SD90AR Slot Drain Installation

## Concrete installation

INTAKE

10mm holes @ 50mm = 0.7 L/s. metre  
 13mm holes @ 50mm = 1.0 L/s. metre  
 12mm Open slot = 2.0 L/s. metre  
 25mm Open slot = 4.0 L/s. metre

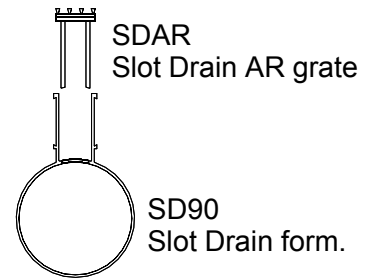

Fix a screw or nail through the end of the SD90 form to support the SDi beige insert at the desired height. It should be set to finish 2mm lower than FFL.

Secure drain, it will float & move when concreting.

Bed the SD90 to create desired fall to outlet. Use standard 90mm fittings to join to stormwater system

Trench as per standard stormwater requirements.

Finish concrete 2mm higher than Slot Drain insert

